


Quick Guide


-DC9253AP (with Battery)
-DC9253AN (without Battery)

1 H92P/H92N

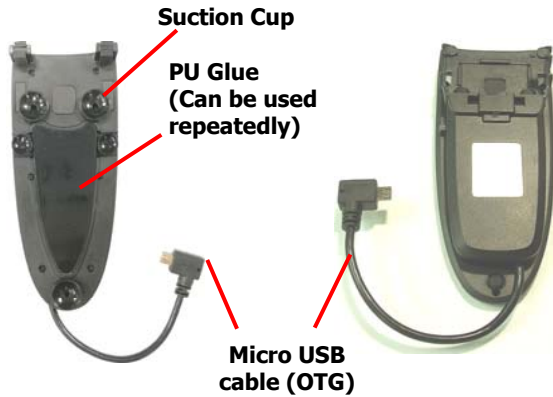


Connect to micro USB port of OTG device

2 H92P/H92N

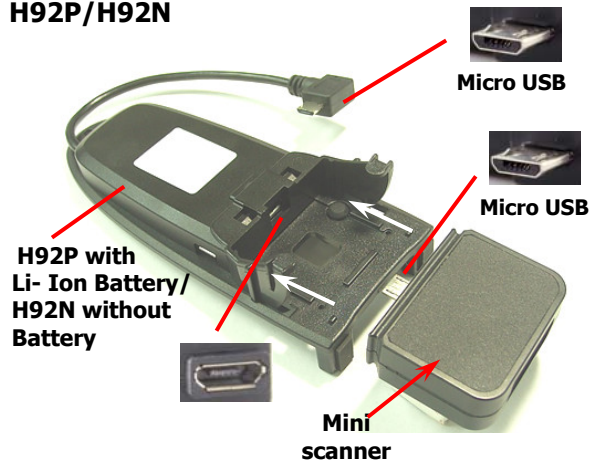


3 O = Operation mode C = Charge mode

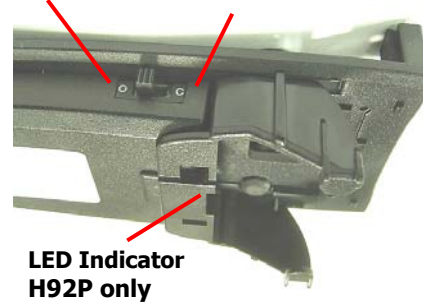

- * Before you use it, please switch to "C" for battery charge for 3~4 hours.
- * Under "C mode", you can raise/lower soft-keyboard easily.

4

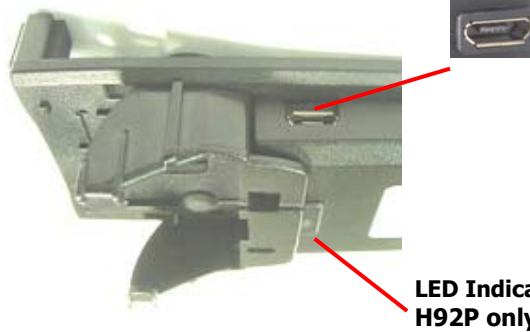


H92P Scan Holder is with Li-Ion battery inside. When in charging, please use the original power adaptor of smartphone (recommend). Through it, it charges both OTG device and H92P internal battery at the same time. When in low battery (Red LED flashing), please charge it immediately.

LED Indicator Information	
Green LED OFF	Full charged (Charge mode)
Green LED ON	Charging (Charge mode)
Red LED Flashing	Low battery (Operation mode)

Attention: Under "Operation mode" please do not charging, otherwise the OTG device's battery will be charging back to H92P's battery.

5

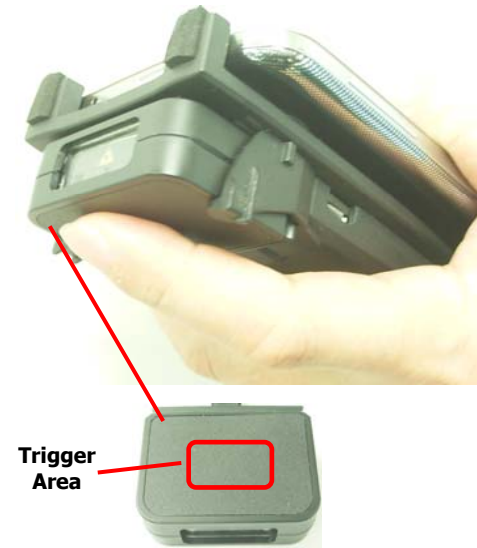

The touch trigger is in the central area of mini scanner. (for both side). Please check the above drawing for your reference.

Installation

Before using scanner, please make sure that the OTG device is fully charged.

- Under USB HID interface
 - ** When plugged into OTG device, it will be recognized and begin to scan the barcode.
- Under USB Serial interface
 - ** Please install PL-2303 driver into your OTG device first. PL-2303 driver can be downloaded from Google Play
 - ** Connect scanner to your OTG device, then, you can know which serial port scanner connects to.
 - ** The data you scan will be sent to serial port and your APP can get the data from serial port directly.

Reset Configuration to Default :

If you are unsure of the scanner configuration or have scanned the incorrect codes, please scan A1 to A2 for USB HID or B1 for RS232 or USB Serial. This will reset the scanner to its factory defaults.



*Note : Please install PL-2303 driver for USB serial

Keyboard Language (For USB HID only)

Scan the appropriate country code as below to program the keyboard layout for your country or language. As a general rule, the following characters are supported, but need special care for countries other than the United States:

@ | \$ # { } [] = / ` \ < > ~



USA
(Original setting)



Norway



Germany



Sweden



Denmark



Switzerland



Italian



France



Vietnam



Spain



Portugal



Hungary

1D Symbolologies – 1



CODABAR



Code 39



Code 32



**Code 39
FULL ASCII**



Interleaved 25



Code93



Matrix 25



IATA 25



1D Symbolologies – 2



CODE 11



ISBT 128



GS1-128



TELEPEN



UPC-A



EAN-13



EAN-8



1D Symbolologies – 3

ENABLE 	<u>MSI</u>	DISABLE 
ENABLE 	<u>GS1 Omnidirectional</u>	DISABLE 
ENABLE 	<u>GS1 DataBar Limited</u>	DISABLE 
ENABLE 	<u>GS1 DataBar Expanded</u>	DISABLE 
ENABLE 	<u>CHINA POST</u>	DISABLE 
ENABLE 	<u>PLESSY CODEL</u>	DISABLE 
ENABLE 	<u>INDUSTRIAL 25</u>	DISABLE 

● Information in this document is subject to change without notice.
Q_200325_01